


# PLASTIC FLEXIBLE CHAINS



## 1701/1701TAB MULTIFLEX CHAINS

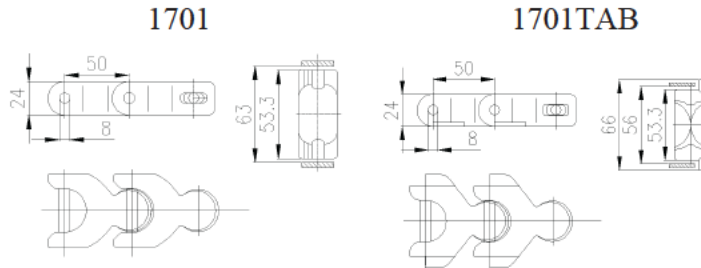

Mat.: POM  
 Pin Mat.:stainless steel  
 Color:white/brown  
 Work load:4000N  
 Max. speed: 60m/min lubrication  
 40m/min dry  
 Max.length:15m  
 Packing:10ft(61 links)

Code	Width	Weight	Backflex R	Min. Radius
	mm	kg/m	mm	mm
1700	53.3	1.37	75	150
1700TAB	53.3	1.40	75	150


## 1702 MULTIFLEX CHAINS



Mat.: POM  
 Pin Mat.:stainless steel  
 Color:white/brown  
 Work load:4000N  
 Max. speed:60m/min lubrication  
 40m/min dry  
 Max.length:15m  
 Packing:10ft(61 links)

Code	Width	Weight	Backflex R	Min. Radius
	mm	kg/m	mm	mm
1702	53.3	1.45	75	150

## SPROCKETS FOR 1701/1701TAB/1702/1702M





No of teeth	Pitch Dia.	Outside Dia.	Bore
	mm	mm	mm
8	130.6	135	min. 20 max. 40
10	161.8	165	
12	193.1	197.6	
14	224.7	229.2	

Machined sprockets;Mat.:PA6;Color:white

# PLASTIC FLEXIBLE CHAINS



## 2600/2600TAB CRATE CHAINS OPEN TOP

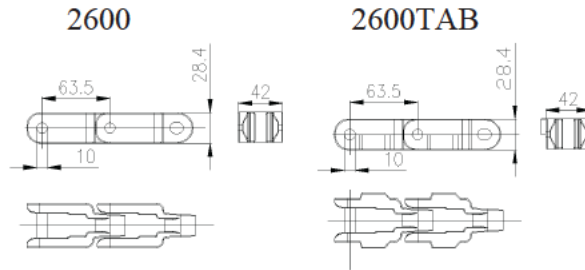

Mat.: POM  
 Pin Mat.:stainless steel  
 Color:white/brown  
 Work load:6000N  
 Max. speed: 50m/min lubrication  
 25m/min dry  
 Max.length:15m  
 Packing:10ft(48 links)

Code	Width	Weight	Backflex R	Min. Radius
	mm	kg/m	mm	mm
2600	42	1.05	75	600
2600TAB	42	1.10	75	600


## 2600-C CRATE CHAINS CLOSED TOP



Mat.: POM  
 Pin Mat.:stainless steel  
 Color:white/brown  
 Work load:6000N  
 Max. speed: 50m/min lubrication  
 25m/min dry  
 Max.length:15m  
 Packing:10ft(48 links)

Code	Width	Weight	Backflex R	Min. Radius
	mm	kg/m	mm	mm
2600-C	42	1.15	75	600

## SPROCKETS FOR 2600/2600TAB/2600-C



No of teeth	Pitch Dia.	Outside Dia.	Bore
	mm	mm	mm
8	165.9	176.4	min. 20 max. 40
10	205.5	216.2	
12	245.35	256	



Machined sprockets;Mat.:PA6;Color:white

# PLASTIC FLEXIBLE CHAINS

## 1400/1400TAB CRATE CONVEYOR CHAINS

1400


1400TAB

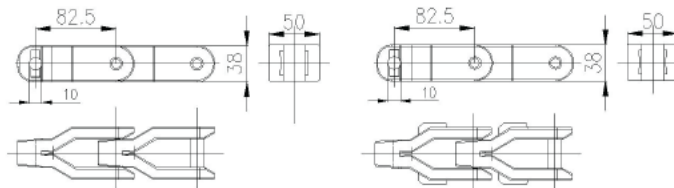

Mat.: POM  
 Pin Mat.:stainless steel  
 Color:white/brown  
 Work load:8000N  
 Max. speed: 50m/min lubrication  
 25m/min dry  
 Max.length:15m  
 Packing:10ft(37 links)

Code	Width	Weight	Backflex R	Min. Radius
	mm	kg/m	mm	mm
1400	50	2.10	75	450
1400TAB	50	2.26	75	450

## SPROCKETS FOR 1400/1400TAB



No of teeth	Pitch Dia.	Outside Dia.	Bore
	mm	mm	mm
8	215.6	227	min. 20
10	267	278.5	max. 40

Machined sprockets;Mat.:PA6;Color:white